

Voltage Repeater

KFD2-VR-Ex1.19-Y109129


- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Voltage input -10 V ... 10 V
- Transmission frequency up to 50 kHz
- Voltage output -10 V ... 10 V



Function

This isolated barrier is used for intrinsic safety applications. It transfers voltage signals from hazardous areas to safe areas. The input voltage of the terminals 4 and 5 is transferred to the terminals 7 and 8. The terminals 4 and 8 have the same polarity. It repeats voltage signals from magnetic pickups, transducers, and flow meters between -10 V... 10 V. This barrier is designed for frequencies up to 50 kHz.

Connection

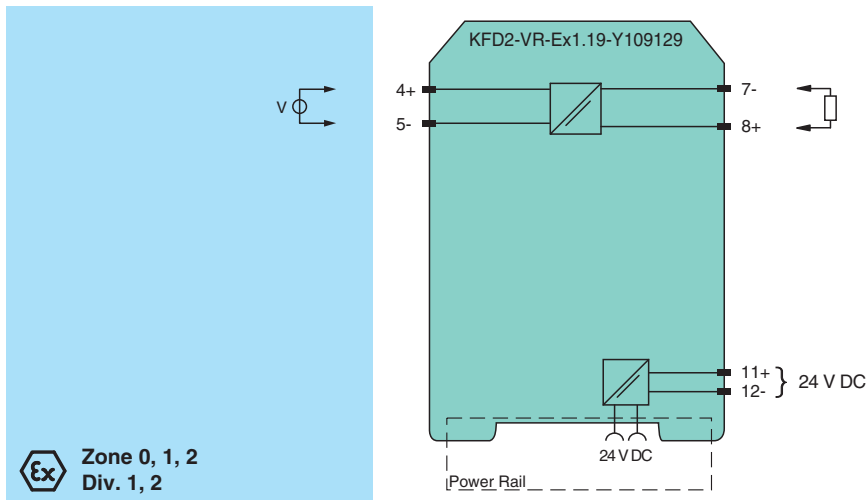

Technical Data

General specifications

Signal type	Analog input	
Supply		
Connection	Power Rail or terminals 11+, 12-	
Rated voltage	U_r	20 ... 35 V DC
Ripple	within the supply tolerance	
Rated current	I_r	< 30 mA
Input		
Connection side	field side	
Connection	terminals 4+, 5-	
Input resistance	min. 10 M Ω	

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 109129_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Transmission range	-10 ... 10 V		
Offset voltage/current	< 10 mV / < 1 µA		
Output			
Connection side	control side		
Connection	terminals 7-, 8+		
Voltage	-10 ... 10 V		
Output resistance	max. 20 Ω		
Transfer characteristics			
Cut-off frequency	50 kHz (-3 dB)		
Deviation			
After calibration	± 30 mV at 20 °C (68 °F)		
Influence of ambient temperature	< 0.01 % of span per K		
Rise time	≤ 10 µs		
Galvanic isolation			
Output/power supply	functional insulation, rated insulation voltage 50 V AC		
Indicators/settings			
Display elements	LED		
Labeling	space for labeling at the front		
Directive conformity			
Electromagnetic compatibility			
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)		
Conformity			
Electromagnetic compatibility	NE 21		
Degree of protection	IEC 60529		
Ambient conditions			
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)		
Mechanical specifications			
Degree of protection	IP20		
Connection	screw terminals		
Mass	approx. 110 g		
Dimensions	20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) (W x H x D) , housing type B1		
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001		
Data for application in connection with hazardous areas			
EU-type examination certificate	BAS 01 ATEX 7262		
Marking	⊕ II (1)GD, I (M1) [Ex ia Ga] IIC, [Ex ia Da] IIC, [Ex ia Ma] I (-20 °C ≤ T _{amb} ≤ 60 °C) , [circuit(s) in zone 0/1/2]		
Voltage	U _o	15.5 V	
Current	I _o	7.2 mA	
Power	P _o	28 mW	
Supply			
Maximum safe voltage	U _m	250 V (Attention! The rated voltage is lower.)	
Output			
Maximum safe voltage	U _m	250 V (Attention! The rated voltage is lower.)	
Certificate			
Marking	⊕ II 3G Ex ec IIC T4 Gc [device in zone 2]		
Galvanic isolation			
Input/Output	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V		
Input/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V		
Directive conformity			
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-7:2015+A1:2018		
International approvals			
FM approval			
Control drawing	116-0129		


Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 109129_eng.pdf

Technical Data







UL approval		
Control drawing		116-0173 (cULus)
CSA approval		
Control drawing		116-0132
IECEX approval		
IECEX certificate		IECEX BAS 10.0040X
IECEX marking		Ex ec IIC T4 Gc
General information		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .	

Assembly

Front view

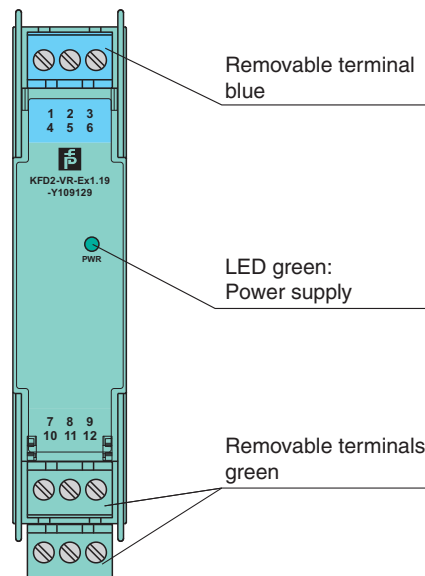

Matching System Components

	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 109129_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com




USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Accessories

	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6